

Installing the Cutter for a Sumitag SS Printer


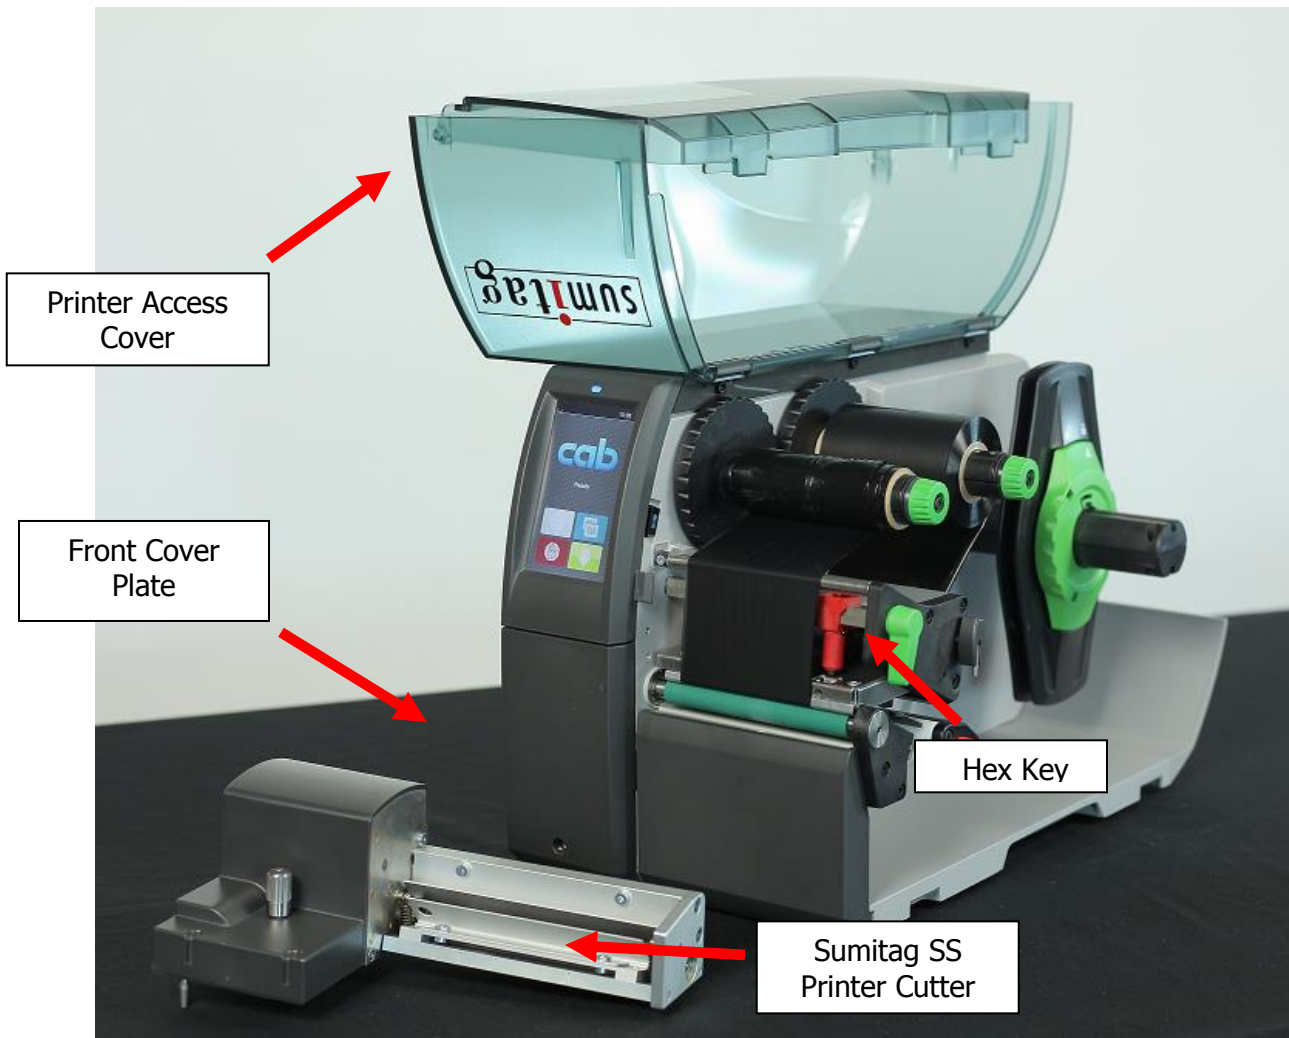


Figure 3a

1. Power off the printer.
2. Open the **Printer Access Cover**.
3. Remove the mounting screw on the **Front Cover Plate** with the provided **Hex Key**. Remove the **Front Cover Plate**. See *Figure 3a*
4. Line up the back of the cutter with the mounting points on the printer. See *Figure 3b*

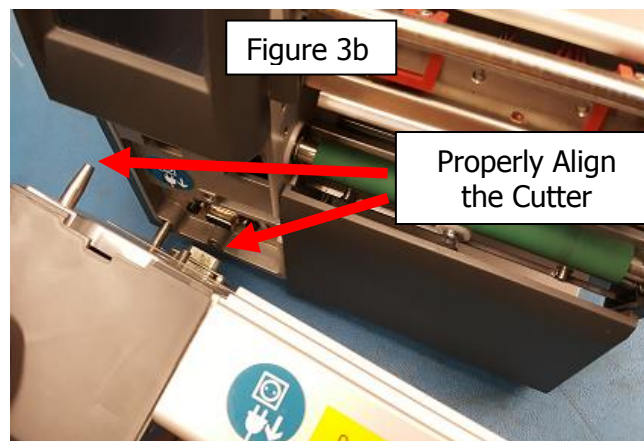

5. After mounting the cutter, turn the thumbscrew a few turns clockwise to lock the cutter into place.
See Figure 3c

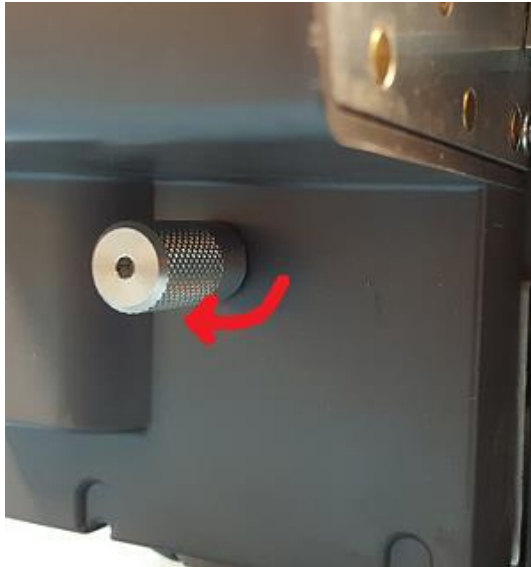


Figure 3c

6. Power on the printer. The cutter will calibrate and cycle a cut.
CAUTION! Keep clear of the cutter opening when cutter is in use!
7. The cutter is now ready to use with the printer.

